Qualitatively superior dehumidifiers



STIELOW Dehumidifier AIRDRY 6 D pro, 6 plus D pro, 5 D pro



Service providers, construction companies, equipment rental companies, commercial and private customers have been utilising the advantages of AIRDRY dehumidifiers for many years. Whether as a single appliance or for 'fleet use': AIRDRY appliances last longer than others and impress with their extreme value in daily use. Accidental damage is almost unheard of, so that the appliances remain operational even after long periods of use.

Their robustness and favourable power consumption, combined with simple handling and complete standard

Standard equipment

- Water tank
- Water level indicator light
- automatic appliance switchoff when the water tank is full
- 1/2" threaded drain connection for permanent water drainage
- Industrial swivel castors
- Handle scales on both sides
- Axial fan stepless
- aluframe-tec-composite
- hot gas defrosting -(6 plus D pro, 5 D pro)
- fully automatic operation
- operating hours counter

Extras

- Electricity consumption meter
- V2A Housing
- Crane hook attached

- Sound-absorbing "Armstrong" version
- Aggregate sealing • Power connection cable
- up to 30 m external humidity controller
- Dew point controller internal/external
- separate frost monitor Special paintwork
- according to RAL
- Special paintwork on request
- Tropical version (over 30°C)
- Condensate water pump 1.5 - 6.0 m delivery head
- Built-in fault indicator Data bus Remote monitoring
- Protection class IP 54



30% Energy saving !

DIGITAL CONTROL – illuminated display, 4 buttons for easy programming, display correction individually selectable, hysteresis (humidity deviation) adjustable, response time of less than 1 second, self-diagnosis every second, visual error messages on the display, pre-programmed, self-calibrating, green dehumidification indicator light, orange defrost indicator light, red warning light Water tank filled to maximum.

16-27 litre class 150-250 cbm Volume


equipment, make them superior. Special requests can be catered for as extras.

Trust the original, don't make any compromises if your priority is to be able to dry reliably and permanently.

Low power consumption with maximum water extraction ! Advantage and Technology made in Germany STIELOW



Ideal for people and the environment

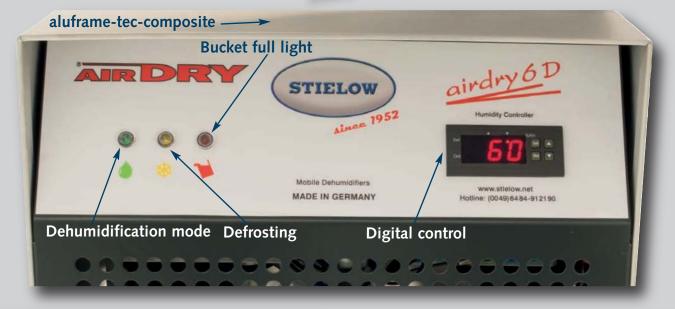

Technical Parameters:			
AIRDRY	6 D pro	6 plus D pro	5 D pro
Max. Water removal	16,1	16,1	27,4
at +30°C / 70% r.H.	10,0	10,0	17,7
at +20°C / 70% r.H.	7,8	7,8	10,0
at + 8°C / 70% r.H.	4,6	4,6	4,9
Compressor PS / kW	0,2/0,15	0,2/0,15	0,22/0,16
Tension V/Hz	230/50	230/50	230/50
Power consumption /h	180 Watt	200 Watt	290 Watt
Cooling capacity kcal/h	550	550	750
Air output cbm cbm/h	450	450	480
Water tank	10 Liter	10 Liter	10 Liter
Work area °C	8 bis 40	*-10 bis 40	*-10 bis 40
Dimensions: Height/Depth/Width		580 / 430 / 380 mm	
Net weight kg	28	28,5	28,5
*assuming that the bath and drain are heated separately			





- Direct water drain - Water tank **Option:** Condensate pump







Standort-Sicherung Deutschland

Industriestrasse 2-4 65614 Beselich-Obertiefenbach Fon 0049 64 84 / 91 21-0 Fax 0049 64 84 / 91 21-50 info@stielow.net · www.stielow.net

AIRDRY 5 D pro





Our service power – five strong advantages for you!

- 1. Expert advice everywhere on site. Our specialist advisors are available nationwide to provide you with help and advice - it doesn't cost anything to ask!
- 2. Service quickly on site throughout Europe. Euro-Express service with pro rata travel allowance
- 3. Repair we will advise you on all questions relating to repairs and will repair your device in our master workshop with a cost estimate at fair prices, even if you did not buy it from us.
- 4. Disposal if a repair is not required, we naturally guarantee the professional disposal of old appliances. A plus for the environment, a service for you.
- 5. Guarantee 1 year for commercial use, 2 years for private use with price/ performance guarantee - Made in Germany.